





# keonn

Modular RFID  
Components

## AdvanSplitter-8™ RFID UHF power splitter

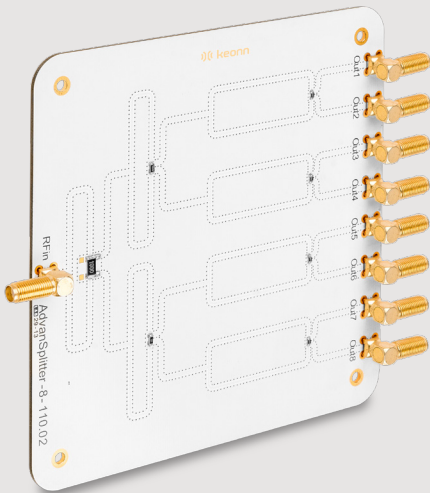



### Benefits:

- Higher speed to scan an area
- Combines different Keonn antennas, creating new antennas with longer read range and narrower beamwidth
- Very fast and easy connection
- Very low insertion loss
- Capable of supporting unbalanced loads

### Applications:

- Smart shelves
- Any RFID application that requires high speed scan
- Any RFID application that requires long read ranges
- Any RFID application that requires narrow beamwidths

### Product overview

AdvanSplitter-8 is a high performance eight port power splitter designed for RFID UHF applications.

AdvanSplitter-8 is ideal for systems where reading speed is critical and tag location is not determinant. AdvanSplitter-8 can feed up to 8 antennas simultaneously in order to scan an area much faster than using multiplexers.

AdvanSplitter-8 can also combine different Keonn antennas in new ways, creating new antennas with longer read range and narrower beamwidth.

AdvanSplitter-8 can therefore be used to create new antennas adapted to the needs of each RFID application. This flexibility allows to find the optimal antenna solution for any RFID project.


AdvanSplitter-8 has very low insertion loss, typically 0.7 dB above the 9 dB split.

AdvanSplitter-8 has been designed to keep its performance even when one or some ports are not connected to any antenna.

### Technical specifications

Operating frequency	860 MHz to 950 MHz
Number of ports	8
Insertion loss (above 9 dB)	1.1 dB (typ.), 1.4 dB (max.)
Input return loss	14.0 dB (typ.), 11.0 dB (min.)
Output return loss	16.0 dB (typ.), 15.0 dB (min.)
Maximum input power isolation	24.0 dB (typ.), 20.0 dB (min.)
Maximum input power	33 dBm
Phase unbalance	< 1°
Amplitude unbalance	0.3 dB
RF connectors	1 input and 4 output SMA 50 ohm female connectors
Weight with enclosure	162 mm x 145 mm x 25 mm (6.4 inches x 5.7 inches x 1 inch)
Weight without enclosure	162 mm x 137 mm x 14 mm (6.4 inches x 5.4 inches x 0.6 inch)
Size with enclosure	330 gr (11.6 oz)
Size without enclosure	103 gr (3.6 oz)
Operating temperature	-30°C to 55°C
Storage temperature	-40 °C to 85 °C
EU Directives	RoHS compliant (2002/95/EC)

## Mechanical specifications

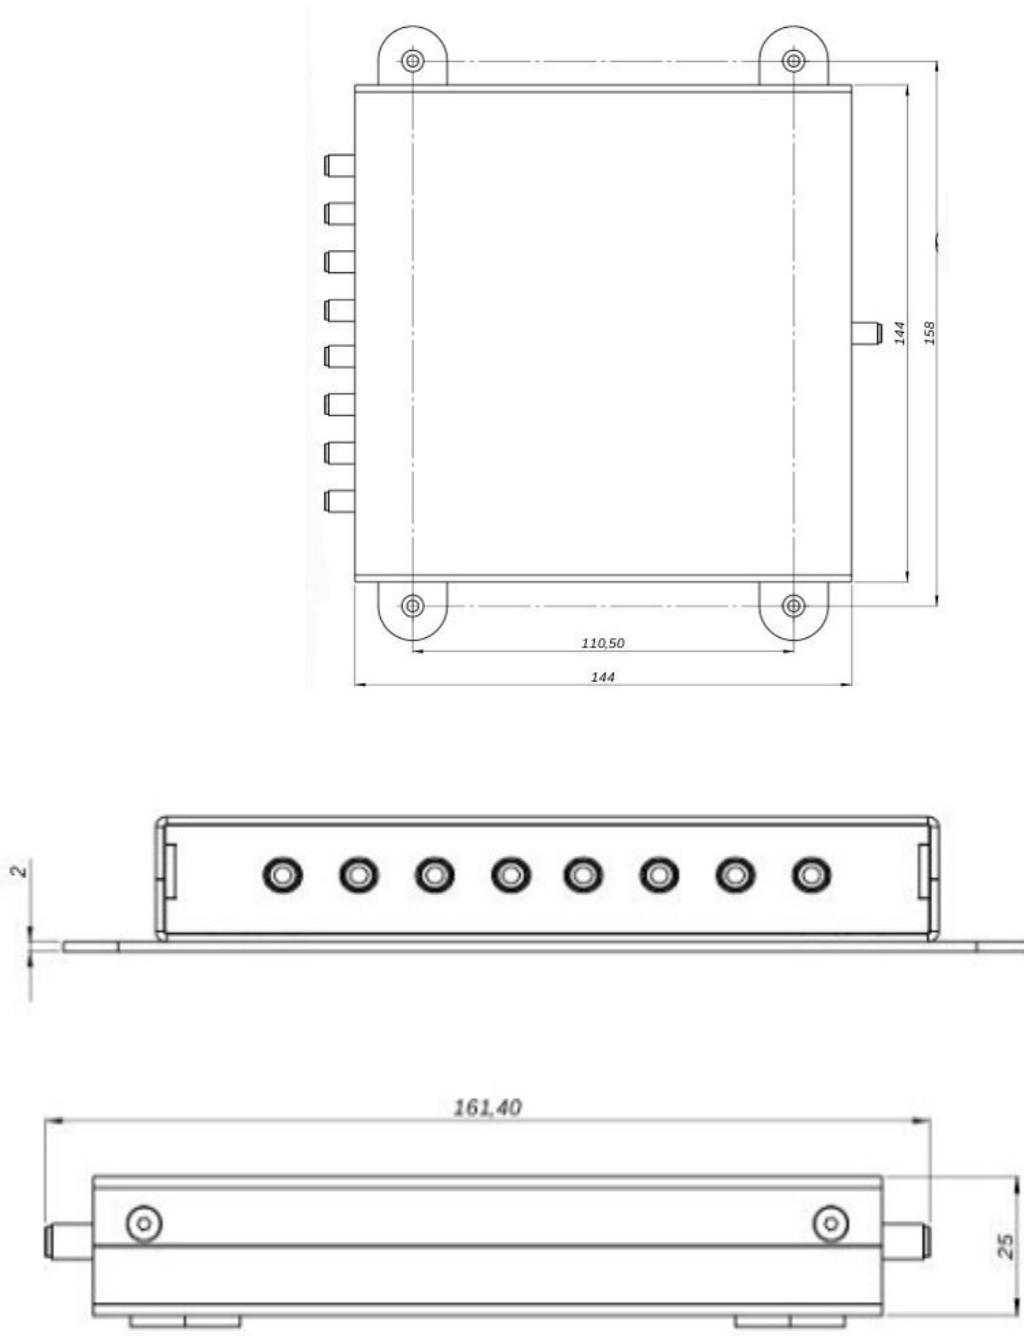

Units in millimeters and [inches]

### Product codes for ordering

ADSP	-	NP	-	F	CT	-	mmm	
								<b>NP = Number of Ports</b>
		2						2 ports
		4						4 ports
		8						8 ports
								<b>F = Frame</b>
				e				Enclosure (only for model with 2 and 4 ports)
								no enclosure
								<b>CT = connector type</b>
					SMA			SMA Straight PCB mount
					MCX			MCX connector (only available in edge mount and flange straight)
								<b>mmm = Model</b>
							110	Model number

Examples:

#### ADSP-8-SMA-110:

- AdvanSplitter
- 8 ports
- without enclosure
- SMA connector type
- Model 110



Copyright © Keonn Technologies S.L.  
All rights reserved.

Information in this publication  
supersedes all earlier versions.  
Specifications subject to change  
without notice.

